



## DuraTech<sup>®</sup> DT

5" - 8" All-Fuel, Double-Wall Chimney System



DuraTech 5"-8" Specifications.....4

Typical Installations .....5

Planning Your Installation.....6

DuraTech 5"-8" Lengths and Components .....7-21

Elbow Offset Chart for 5"-8" DuraTech .....8

# What makes us different from the rest?

DuraTech: The optimum in safety and performance for an all-fuel chimney.



| DuraTech Feature                                                                 | Benefit                                                                                                                      |
|----------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------|
| 5" through 8" diameter selection                                                 | Gives the installer the diameters needed to meet appliance requirements.                                                     |
| Widest variety of lengths - 6", 9", 12", 18", 24", 36", 48" and 60" pipe lengths | Gives the installer the greatest variety of lengths to reach the desired height with ease and least amount of pipe sections. |
| Twist Lock End Rings                                                             | Quick, easy, secure connection. No locking bands required.                                                                   |
| Thickest Stainless Steel Inner Wall                                              | Adds strength, durability and dependability.                                                                                 |
| 1" Double Wall Insulated Pipe                                                    | Small footprint allows easy placement within standard framing construction.                                                  |
| 1" Ceramic Thermal Blanket Insulation                                            | Ensures complete and consistent insulation coverage between inner and outer walls.                                           |

| DuraTech Feature                                     | Benefit                                                                                                        |
|------------------------------------------------------|----------------------------------------------------------------------------------------------------------------|
| Factory Installed Starter Section in the Support Box | Allows the installer a safe, quick and easy connection of chimney to the support box.                          |
| Wide variety of professional-grade support solutions | We have you covered for flat, vaulted/cathedral or through-the-wall installations.                             |
| Reduced Clearance Support Box Option for 6" diameter | Allows for a smaller framed opening while maintaining required clearances.                                     |
| Ceiling Supports with Integrated Flue Extension      | Accepts both single-wall or double-wall stovepipe without requiring a separate adapter.                        |
| 15 and 30 Degree Elbows come with swivel base        | Allows an installer to line up the elbow without unlocking and repositioning the elbow, saving time and money. |
| 15 and 30 Degree Elbows come in kits                 | Kit includes paired set of elbows with elbow strap for installer's convenience.                                |

| DuraTech Feature                         | Benefit                                                                                                                                |
|------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------|
| Adjustable Tee and Wall Support Brackets | Clearances can be adjusted even with the chimney in place.                                                                             |
| Attic Insulation Shield                  | Maintains clearances and prevents insulation from coming into direct contact with the chimney.                                         |
| Stainless Steel Chimney Caps             | Removeable for inspection and maintenance of chimney.                                                                                  |
| Shroud Specifications                    | Shroud specs allow the installer to create a UL listed shroud to hide the termination at the top of the chase for safest installation. |
| Limited Lifetime Warranty                | Gives the homeowner the greatest peace of mind in a quality installation.                                                              |

## Specifications

### Applications

5"-8" DuraTech is a double wall, all-fuel chimney system for use with wood stoves, furnaces, boilers, water heaters, or other appliances fueled by wood, oil, gas, coal, and factory-built and masonry fireplaces.

### Materials and Construction

5"-8" diameter pipe features inner wall of .020" 430 stainless steel. Outer wall options of .016" 430 stainless steel or .021" galvalume steel. A ceramic thermal blanket insulation is encased between walls. Stainless steel end rings seal the pipe.

DuraTech features light weight insulation, twist-lock fittings, support boxes with factory installed starter sections, elbows with 360° swivel base, select black finish pipe lengths, five-foot length pipe sections, and adjustable pipe lengths.

### Clearances

2" clearance to combustibles.

### Shrouds

UL Listed with Duravent shroud specifications. Information available online at [www.duravent.com](http://www.duravent.com) or call and request L157.

### Diameters

5"-8"

For larger sizes from 10" to 24", see DuraTech LDC.

### Listings

c-UL-us Listed to UL 103 Type HT and CAN/ULC-604 (MH7399)  
(Stainless steel outer wall required for oil-burning installations in Canada).



## UL 103 HT and CAN/ULC-604 System

### DuraTech 5"-8"

With a ceramic thermal blanket insulation encased between dual walls, DuraTech offers the optimum in safety and performance. It keeps the outer wall of the chimney cool while ensuring high flue gas temperatures for optimum draft performance.


The inner wall is 25% thicker than competitor's chimneys for an extra margin of safety. No locking bands or mechanical fasteners required.

DuraTech's sleek 1" wall design provides for easy installations through 16" on-center framing. For tight installations, a Reduced Clearance Square Ceiling Support Box is available (6" diameter DuraTech only).


Designed for normal, continuous operation at 1000°F flue gas temperatures, DuraTech is subjected to rigorous and stringent high temperature requirements of the UL 103 Type HT standard, including one hour at 1400°F, plus three ten-minute chimney fire tests at 2100°F.




## Typical Installations For 5"- 8" DuraTech

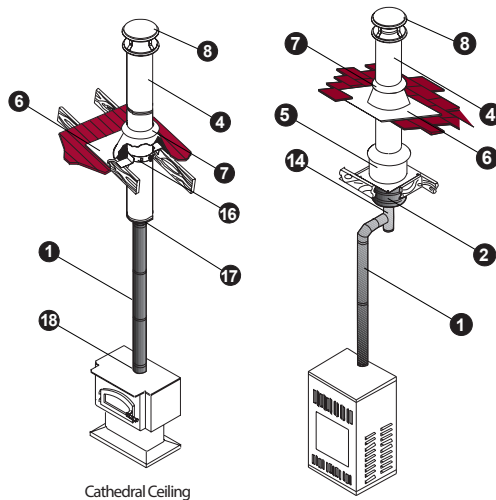



Cathedral Ceiling

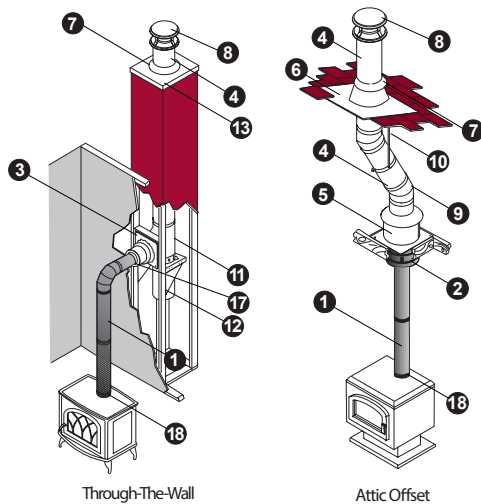

Through-The-Wall

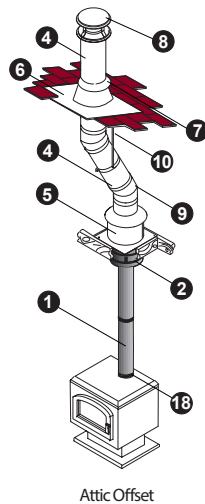


Attic Offset

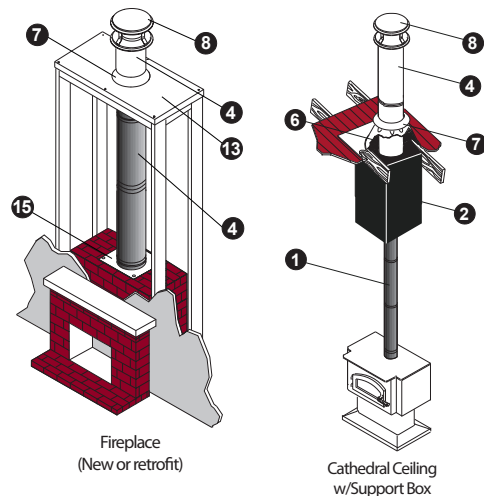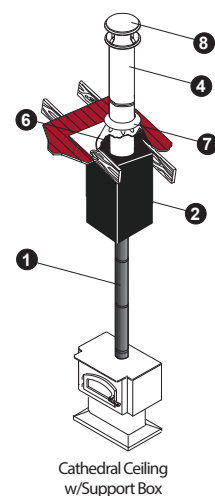
Fireplace  
(New or retrofit)

Cathedral Ceiling  
w/Support Box


| Installation Key |                         |    |                                          |
|------------------|-------------------------|----|------------------------------------------|
| 1                | DVL or DuraBlack        | 10 | Elbow Strap                              |
| 2                | Ceiling Support         | 11 | Tee with Tee Cap                         |
| 3                | Wall Thimble            | 12 | Tee Support                              |
| 4                | Chimney Pipe            | 13 | Chase Top Flashing                       |
| 5                | Attic Insulation Shield | 14 | Connector Pipe Tee                       |
| 6                | Flashing                | 15 | Anchor Plate or Anchor Plate with Damper |
| 7                | Storm Collar            | 16 | Roof Support                             |
| 8                | Chimney Cap             | 17 | Finishing Collar                         |
| 9                | Elbow                   | 18 | DVL Adapter (w/ or w/o damper)           |

Refer to our Typical Installation drawings to select the appropriate component parts for your installation.

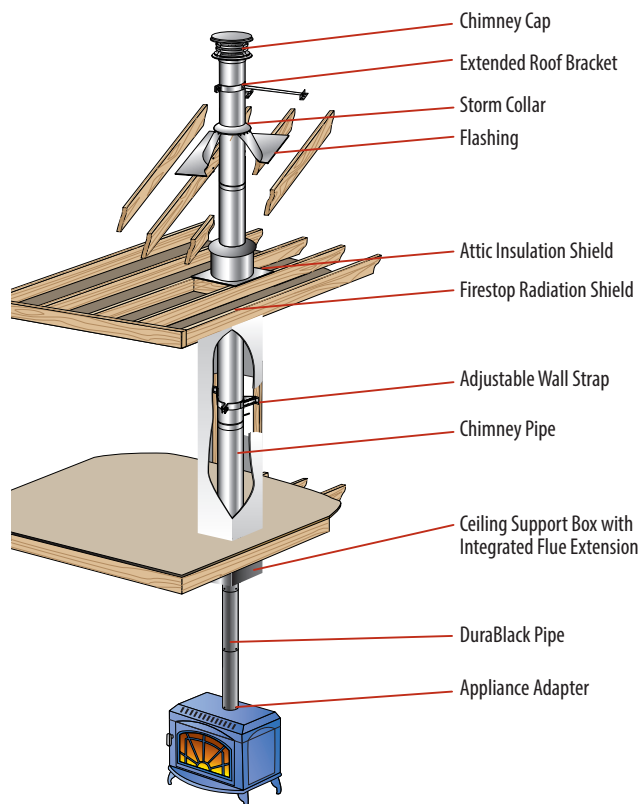- Wall Thimble must be installed with an appropriate length of chimney pipe for all horizontal through-the-wall installations. To accommodate thicker walls, the telescoping pieces of the Wall Thimble can be separated, and a field-fabricated extension may be installed.
- Attic Insulation Shield must be used in all installations that pass through an attic, regardless of whether the attic is insulated or not.
- Firestop Radiation Shield must be used when a chimney passes through a floor or ceiling without a support box.



## Planning Your Installation

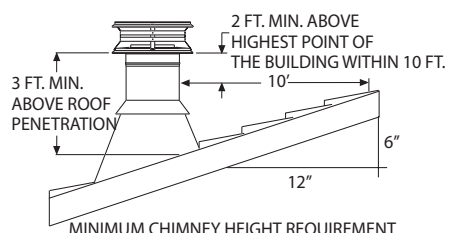


**Figure 1**

The following recommendations are general guidelines to assist in the layout and selection of the chimney components needed for your installation. Always follow Duravent installation instructions, found with the cap or support, when installing your chimney system. Installation instructions can be viewed online at [www.duravent.com](http://www.duravent.com).

- The diameter of the chimney should match the outlet size of the appliance. A properly sized chimney results in improved draft and lessens creosote formation. Select the chimney and either DVL or DuraBlack connector stovepipe with the same size diameter as the appliance flue outlet. For masonry fireplace installations, refer to the sizing chart in this catalog.
- Determine if the installation is a through-the-roof installation or a through-the-wall installation.
- Install the chimney in the interior of the structure whenever possible. A cold, exterior chimney will produce less draft, generate more creosote, and require more maintenance.
- When possible, avoid offsets that serve to restrict the natural draft. A straight vertical installation is more efficient and less likely to develop creosote. If an offset is required to avoid rafters or other obstructions, measure the horizontal distance required and the vertical height available. Both 15° and 30° elbows are available. Elbows have a 360° swivel base to allow orientation of elbow direction only. Elbows are fixed at 15° or 30°. A maximum of two offsets (four elbows) in a single installation are permitted. Refer to the offset table in the back section of this catalog. At least one Elbow Strap is required for each offset. Elbow Straps ensure adequate support.
- Determine the minimum chimney height above the roof line. Building codes require a minimum of 3' above the roof penetration and at least 2' higher than any portion of a building within 10'. See figure 1. The termination cap is installed above that point. If the chimney extends 5' or more above the roof penetration an extended roof bracket is required. An additional roof bracket is needed every 5'.
- Measure the roof pitch. For example, a 6/12 pitch has a vertical rise of 6" over a horizontal distance of 12". Select the appropriate flashing.
- Determine the total length of chimney and stovepipe required for the installation. To calculate the installed length of 5"-8" DuraTech pipe, subtract 1 1/4" per joint. Subtract 1 1/4" per joint of DuraBlack stovepipe. Subtract 1 1/2" per joint of DVL stovepipe. Minimum chimney height, at sea level, of straight vertical chimney is 10' to 15' above the appliance outlet. Higher elevations, or the use of elbows or a tee, will require approximately 30% to 60% more height to provide an adequate draft.
- For a UL approved shroud, see the DuraTech Shroud Installation Instructions (L157). View online at [www.duravent.com](http://www.duravent.com), under the Instructions tab for DuraTech 5"-8".
- Be fire safe. Maintain at least 2" clearance to combustibles. Follow local building codes and have your chimney inspected by a certified professional.

# DuraTech® 5"-8"

## Chimney Pipe



To calculate installed length of 5", 6", 7", or 8" DuraTech Chimney, subtract 1 1/4" from each joint overlap of chimney pipe. Allow a minimum of 2" air space to combustibles when installing DuraTech Chimney.


**Note:** Short, painted Chimney Pipe Sections are intended for interior use with through-the-wall installations; or cathedral ceiling applications where the chimney utilizes a roof support and Finishing Collar.

**5" - 8" Diameters** - Available in stainless steel (5"-8" SS) or galvalume (6"-8" GA) outer casing and stainless steel inner wall with twist-lock connections.

DuraTech 24", 36", 48", and 60" chimney lengths available with additional protective carton filler (CF) for shipping.

| SIZE      | 5"         |           | 6"         |           | 7"         |           | 8"         |           |
|-----------|------------|-----------|------------|-----------|------------|-----------|------------|-----------|
|           | ORDER #    | STOCK #   | ORDER #    | STOCK #   | ORDER #    | STOCK #   | ORDER #    | STOCK #   |
| A         | 5"         |           | 6"         |           | 7"         |           | 8"         |           |
| B         | 7"         |           | 8"         |           | 9"         |           | 10"        |           |
| LENGTH    |            |           |            |           |            |           |            |           |
| 6" GA     | --         | --        | 6DT-06     | 810000067 | 7DT-06     | 810000141 | 8DT-06     | 810000209 |
| 6" BLACK  | --         | --        | 6DT-06B    | 810000068 | 7DT-06B    | 810000142 | 8DT-06B    | 810000210 |
| 6" SS     | 5DT-06SS   | 810000001 | 6DT-06SS   | 810000069 | 7DT-06SS   | 810000143 | 8DT-06SS   | 810000211 |
| 9" GA     | --         | --        | 6DT-09     | 810000070 | 7DT-09     | 810000144 | 8DT-09     | 810000212 |
| 9" BLACK  | --         | --        | 6DT-09B    | 810000071 | 7DT-09B    | 810000145 | 8DT-09B    | 810000213 |
| 9" SS     | 5DT-09SS   | 810000003 | 6DT-09SS   | 810000072 | 7DT-09SS   | 810000146 | 8DT-09SS   | 810000214 |
| 12" GA    | --         | --        | 6DT-12     | 810000073 | 7DT-12     | 810000147 | 8DT-12     | 810000215 |
| 12" BLACK | --         | --        | 6DT-12B    | 810000074 | 7DT-12B    | 810000148 | 8DT-12B    | 810000216 |
| 12" SS    | 5DT-12SS   | 810000005 | 6DT-12SS   | 810000075 | 7DT-12SS   | 810000149 | 8DT-12SS   | 810000217 |
| 18" GA    | --         | --        | 6DT-18     | 810000076 | 7DT-18     | 810000150 | 8DT-18     | 810000218 |
| 18" SS    | 5DT-18SS   | 810000006 | 6DT-18SS   | 810000077 | 7DT-18SS   | 810000151 | 8DT-18SS   | 810000219 |
| 24" GA    | --         | --        | 6DT-24     | 810000078 | 7DT-24     | 810000152 | 8DT-24     | 810000220 |
| 24" GA    | --         | --        | 6DT-24CF   | 810000079 | 7DT-24CF   | 810000153 | 8DT-24CF   | 810000221 |
| 24" SS    | 5DT-24SS   | 810000008 | 6DT-24SS   | 810000080 | 7DT-24SS   | 810000154 | 8DT-24SS   | 810000222 |
| 24" SS    | 5DT-24SSCF | 810000009 | 6DT-24SSCF | 810000081 | 7DT-24SSCF | 810000155 | 8DT-24SSCF | 810000223 |
| 36" GA    | --         | --        | 6DT-36     | 810000082 | 7DT-36     | 810000156 | 8DT-36     | 810000224 |
| 36" GA    | --         | --        | 6DT-36CF   | 810000083 | 7DT-36CF   | 810000157 | 8DT-36CF   | 810000225 |
| 36" SS    | 5DT-36SS   | 810000010 | 6DT-36SS   | 810000084 | 7DT-36SS   | 810000158 | 8DT-36SS   | 810000226 |
| 36" SS    | 5DT-36SSCF | 810000011 | 6DT-36SSCF | 810000085 | 7DT-36SSCF | 810000159 | 8DT-36SSCF | 810000227 |
| 48" GA    | --         | --        | 6DT-48     | 810000086 | 7DT-48     | 810000160 | 8DT-48     | 810000228 |
| 48" GA    | --         | --        | 6DT-48CF   | 810000087 | 7DT-48CF   | 810000161 | 8DT-48CF   | 810000229 |
| 48" SS    | 5DT-48SS   | 810000012 | 6DT-48SS   | 810000088 | 7DT-48SS   | 810000162 | 8DT-48SS   | 810000230 |
| 48" SS    | 5DT-48SSCF | 810000013 | 6DT-48SSCF | 810000089 | 7DT-48SSCF | 810000163 | 8DT-48SSCF | 810000231 |
| 60" GA    | --         | --        | 6DT-60CF   | 810000090 | 7DT-60CF   | 810000164 | 8DT-60CF   | 810000232 |
| 60" SS    | 5DT-60SSCF | 810000014 | 6DT-60SSCF | 810000091 | 7DT-60SSCF | 810000165 | 8DT-60SSCF | 810000233 |


## Adjustable Pipe



Use to add length to DuraTech chimney where exact length is needed.

| SIZE    | 6"         | 8"         |
|---------|------------|------------|
| A       | 14"-22"    |            |
| ORDER # | 6DT-21TASS | 8DT-21TASS |
| STOCK # | 810000092  | 810000234  |


## Elbow Kit



Elbow Kit includes: 2 Elbows and 1 Elbow Strap. Use for offsets around obstructions such as rafters, ridgepoles, or joists. May use two pair of elbows, if needed. Offsets greater than 30° are not permitted in accordance to UL 103 standards. Elbows swivel 360° at base (angles are not adjustable). A pair of elbows is required to return an offset chimney back to vertical. Available in stainless steel (5"-8" SS) or galvalume (6"-8" GA) outer wall.


| STRAP SIZE | 5" & 7" | 6" & 8" |
|------------|---------|---------|
| A          | 7", 9"  | 8", 10" |

|    | 15°     | 5"         | 6"         | 7"         | 8"         |    | 30°     | 5"         | 6"         | 7"         | 8"         |
|----|---------|------------|------------|------------|------------|----|---------|------------|------------|------------|------------|
| GA | ORDER # | --         | 6DT-E15K   | 7DT-E15K   | 8DT-E15K   | GA | ORDER # | --         | 6DT-E30K   | 7DT-E30K   | 8DT-E30K   |
|    | STOCK # | --         | 810000093  | 810000166  | 810000235  |    | STOCK # | --         | 810000095  | 810000168  | 810000237  |
| SS | ORDER # | 5DT-E15KSS | 6DT-E15KSS | 7DT-E15KSS | 8DT-E15KSS | SS | ORDER # | 5DT-E30KSS | 6DT-E30KSS | 7DT-E30KSS | 8DT-E30KSS |
|    | STOCK # | 810000015  | 810000094  | 810000167  | 810000236  |    | STOCK # | 810000016  | 810000096  | 810000169  | 810000238  |

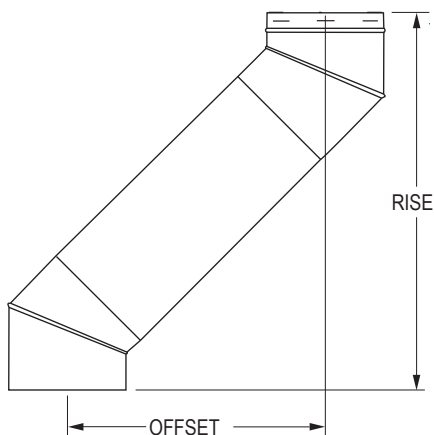Elbow Offset Chart  
For 5"- 8" DuraTech

| SIZE                      |                               | 5", 6", 7", 8" Diameter |             |
|---------------------------|-------------------------------|-------------------------|-------------|
| Elbow Angle from Vertical | Chimney Length Between Elbows | Offset inches           | Rise inches |
| 15°                       | 0"                            | 2"                      | 16 1/2"     |
| 15°                       | 6"                            | 3 1/4"                  | 21 1/4"     |
| 15°                       | 9"                            | 4"                      | 24 1/8"     |
| 15°                       | 12"                           | 4 3/4"                  | 27"         |
| 15°                       | 18"                           | 6 1/4"                  | 32 3/4"     |
| 15°                       | 24"                           | 8"                      | 38 1/2"     |
| 15°                       | 36"                           | 11"                     | 50 1/4"     |
| 15°                       | 48"                           | 14 1/4"                 | 61 3/4"     |
| 15°                       | 48" + 6"                      | 15 1/2"                 | 66 1/2"     |
| 15°                       | 48" + 9"                      | 16 1/4"                 | 69 3/8"     |
| 15°                       | 48" + 12"                     | 17"                     | 72 1/4"     |
| 15°                       | 48" + 18"                     | 18 1/2"                 | 78"         |
| 15°                       | 48" + 24"                     | 20"                     | 83 3/4"     |
| 30°                       | 0"                            | 4"                      | 15 3/4"     |
| 30°                       | 6"                            | 6 1/4"                  | 20"         |
| 30°                       | 9"                            | 7 3/4"                  | 22 5/8"     |
| 30°                       | 12"                           | 9 1/4"                  | 25 1/4"     |
| 30°                       | 18"                           | 12 1/4"                 | 30 1/4"     |
| 30°                       | 24"                           | 15 1/4"                 | 35 1/2"     |
| 30°                       | 36"                           | 21 1/4"                 | 46"         |
| 30°                       | 48"                           | 27 1/4"                 | 56 1/4"     |
| 30°                       | 48" + 6"                      | 29 3/4"                 | 60 1/2"     |
| 30°                       | 48" + 9"                      | 31 1/4"                 | 63 1/8"     |
| 30°                       | 48" + 12"                     | 32 3/4"                 | 65 3/4"     |
| 30°                       | 48" + 18"                     | 35 3/4"                 | 71"         |
| 30°                       | 48" + 24"                     | 38 3/4"                 | 76"         |


## Adjustable Elbow Strap



Use to prevent excessive weight on the elbows by supporting the weight of the chimney. Required to be installed between two elbows in offset installations. Multiple elbow straps may be required for offset installations. Refer to installation instructions.

| SIZE    | 5" & 7"   | 6" & 8"   |
|---------|-----------|-----------|
| A       | 7", 9"    | 8", 10"   |
| ORDER # | 5DT-AES   | 6DT-AES   |
| STOCK # | 810007985 | 810007986 |

## Tee w/ Cap

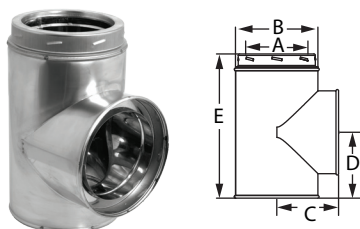

Use for through-the-wall installations. Includes removable tee cap for easy chimney cleaning or inspection. Stainless Steel inner wall and available with Stainless Steel (SS) or Galvalume (GA) outer wall. See installation instructions for proper location and installation of Tee.

| SIZE |         | 5"        | 6"        | 7"        | 8"        |
|------|---------|-----------|-----------|-----------|-----------|
| A    |         | 5"        | 6"        | 7"        | 8"        |
| B    |         | 7"        | 8"        | 9"        | 10"       |
| C    |         | 5 1/2"    | 6 1/8"    | 6 1/2"    | 7 1/8"    |
| D    |         | 6"        | 6 1/2"    | 7 1/2"    | 7 3/4"    |
| E    |         | 12 5/8"   | 13 7/8"   | 14 1/4"   | 15 1/4"   |
| GA   | ORDER # | --        | 6DT-ST    | 7DT-ST    | 8DT-ST    |
|      | STOCK # | --        | 810000113 | 810000186 | 810000254 |
| SS   | ORDER # | 5DT-STSS  | 6DT-STSS  | 7DT-STSS  | 8DT-STSS  |
|      | STOCK # | 810000036 | 810000114 | 810000187 | 810000255 |


## Locking Band



Use for extra security at pipe, elbow, and tee joints. Optional.

| SIZE    | 5"        | 6"        | 7"        | 8"        |
|---------|-----------|-----------|-----------|-----------|
| A       | 7"        | 8"        | 9"        | 10"       |
| ORDER # | 5DT-LB    | 6DT-LB    | 7DT-LB    | 8DT-LB    |
| STOCK # | 810000051 | 810000136 | 810000204 | 810000277 |

Square Ceiling Support Box

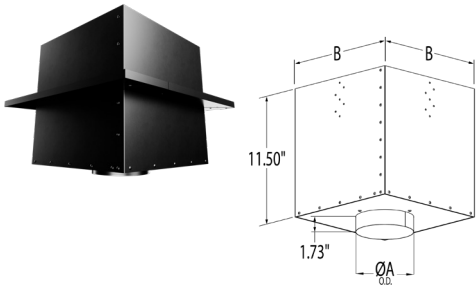


| CEILING PITCH |               |                 |
|---------------|---------------|-----------------|
| DURABLACK     | DVL           | USE             |
| 0/12 - 4/12   | 0/12 - 6/12   | 11" Support box |
| 5/12 - 9/12   | 7/12 - 13/12  | 24" Support box |
| 10/12 - 14/12 | 14/12 - 20/12 | 36" Support box |

Supports chimney pipe and provides a positive connection between support box and chimney with a built-in twist-lock. Suitable for both flat and cathedral (A-Frame) ceiling applications. Also use in short attic spaces (see instructions). Fits between standard 16" on-center joists and most manufactured home applications. Support Box includes Integrated Starter-Coupler, Integrated Flue Extension, and 2-piece Black Ceiling Trim. Integrated Flue Extension accepts either single-wall or double-wall stovepipe.

| SIZE   |         | 5"         | 6"         | 7"         | 8"         |
|--------|---------|------------|------------|------------|------------|
| A      |         | 5"         | 6"         | 7"         | 8"         |
| B      |         | 11"        | 12"        | 13"        | 14 ¼"      |
| C      |         | 1 ¾"       | 1 ¾"       | 1 ¾"       | 1 ¾"       |
| HEIGHT |         |            |            |            |            |
| 11"    | ORDER # | 5DT-CS11-2 | 6DT-CS11-2 | 7DT-CS11-2 | 8DT-CS11-2 |
|        | STOCK # | 810018487  | 810018488  | 810018489  | 810018490  |
| 24"    | ORDER # | -          | 6DT-CS24-2 | 7DT-CS24-2 | 8DT-CS24-2 |
|        | STOCK # | -          | 810018492  | 810018493  | 810018494  |
| 36"    | ORDER # | -          | 6DT-CS36-2 | 7DT-CS36-2 | 8DT-CS36-2 |
|        | STOCK # | -          | 810018496  | 810018497  | 810018499  |


Reduced Clearance  
Square Ceiling Support Box

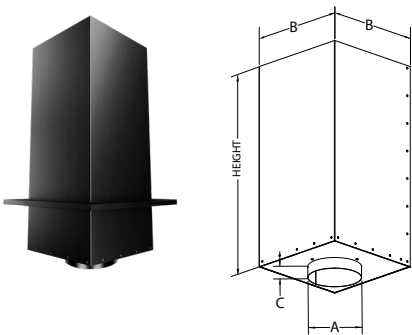

Supports chimney pipe and provides a positive connection between support box and chimney with a built-in twist-lock. Suitable for both flat and cathedral (A-Frame) ceiling applications. Also use in short attic spaces (see instructions). Fits between standard 12" on center joists and most manufactured home applications. Support Box includes Integrated Starter-Coupler, Integrated Flue Extension, and 2-piece Black Ceiling Trim. Integrated Flue Extension accepts either single-wall or double-wall stovepipe.

| SIZE   |         | 6"          |
|--------|---------|-------------|
| A      |         | 6"          |
| B      |         | 10"         |
| C      |         | 1 ¾"        |
| HEIGHT |         |             |
| 24"    | ORDER # | 6DT-CS24R-2 |
|        | STOCK # | 810018499   |


Square Ceiling Support Box  
w/ Collar

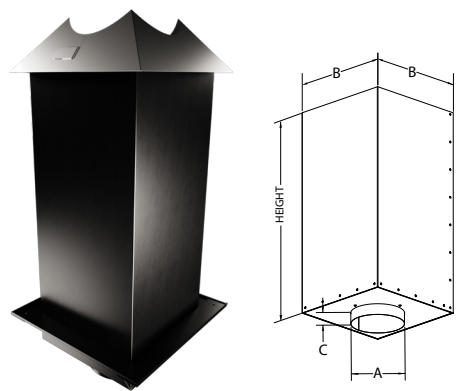

Use with flat, vaulted, or cathedral ceilings where there is an attic space above. Supports up to 60' of DuraTech Chimney. Functions as an Attic Insulation Shield when installed with Square-to-Round Collar. Integrated adapter accepts either single-wall or double-wall stovepipe. Support Box includes Integrated Starter-Coupler, Integrated Flue Extension, Square-to-round Collar and 2-piece Black Ceiling Trim.

| SIZE   |         | 6"           |
|--------|---------|--------------|
| A      |         | 6"           |
| B      |         | 12"          |
| C      |         | 1 3/4"       |
| HEIGHT |         |              |
| 24"    | ORDER # | 6DT-CS24IS-2 |
|        | STOCK # | 810018500    |
| 36"    | ORDER # | 6DT-CS36IS-2 |
|        | STOCK # | 810018501    |


Reduced Clearance Square  
Ceiling Support Box  
w/ Collar

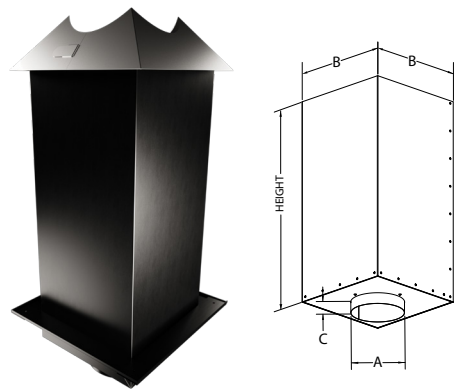

Use with flat, vaulted, or cathedral ceilings where there is an attic space above. Supports up to 60' of DuraTech Chimney. Functions as an Attic Insulation Shield when installed with Square-to-Round Collar. Integrated adapter accepts either single-wall or double-wall stovepipe. Support Box includes Integrated Starter-Coupler, Integrated Flue Extension, Square-to-round Collar and 2-piece Black Ceiling Trim.

| SIZE   |         | 6"            |
|--------|---------|---------------|
| A      |         | 6"            |
| B      |         | 10"           |
| C      |         | 1 3/4"        |
| HEIGHT |         |               |
| 24"    | ORDER # | 6DT-CS24RIS-2 |
|        | STOCK # | 810018503     |


Round Ceiling Support Box

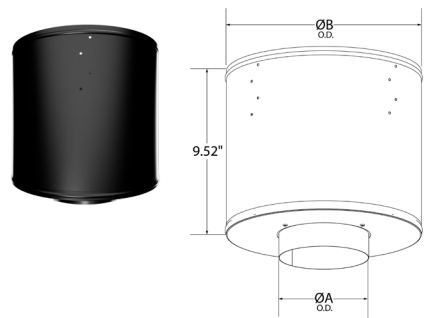

Supports chimney pipe and provides a positive connection between support box and chimney with a built-in twist-lock. Supports up to 60' of DuraTech Chimney. Painted black. Trim collars are sold separately. Integrated adapter accepts either single-wall or double-wall stovepipe.

| SIZE    | 6"        | 7"        | 8"        |
|---------|-----------|-----------|-----------|
| ØA O.D. | 6"        | 7"        | 8"        |
| ØB O.D. | 12"       | 13"       | 14"       |
| ORDER # | 6DT-RCS-2 | 7DT-RCS-2 | 8DT-RCS-2 |
| STOCK # | 810018505 | 810018506 | 810018507 |


Trim Collar for Round Support Box

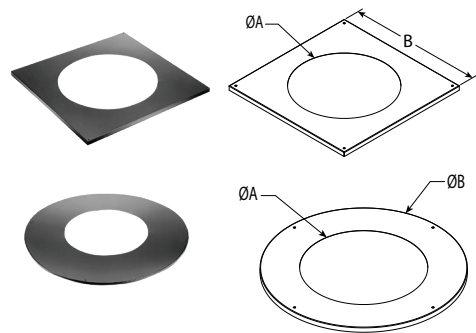

Conceals the gap between the Round Ceiling Support Box and the ceiling cutout. Select square or round. Painted black.

| SQUARE TRIM COLLAR |           |           |           | ROUND TRIM COLLAR |           |           |           |
|--------------------|-----------|-----------|-----------|-------------------|-----------|-----------|-----------|
| SIZE               | 6"        | 7"        | 8"        | SIZE              | 6"        | 7"        | 8"        |
| A                  | 12 1/8"   | 13 1/8"   | 14 1/8"   | A                 | 12 1/8"   | 13 1/8"   | 14 1/8"   |
| B                  | 17"       | 18"       | 19"       | B                 | 18"       | 21"       | 21"       |
| ORDER #            | 6DT-TC-2  | 7DT-TC-2  | 8DT-TC-2  | ORDER #           | 6DT-TCR-2 | 7DT-TCR-2 | 8DT-TCR-2 |
| STOCK #            | 810018645 | 810018646 | 810018647 | STOCK #           | 810018649 | 810018650 | 810018651 |


Unpainted Flat Ceiling Support Box

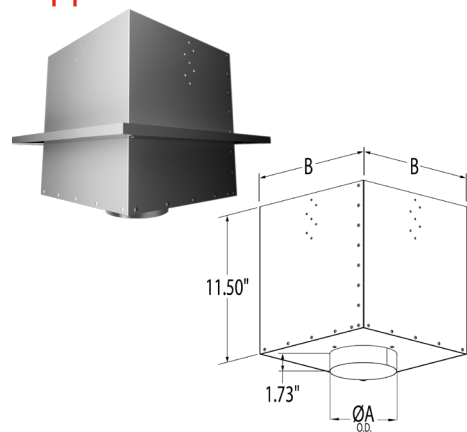

Supports chimney pipe and provides a positive connection between support box and chimney with a built-in twist-lock. Designed for use in mechanical room installations in flat ceilings only. Supports up to 60' of DuraTech Chimney. A 2" wide trim collar is included. Not painted but can be painted with high temperature paint. Integrated adapter accepts either single-wall or double-wall stovepipe.

| SIZE    | 6"        | 7"        | 8"        |
|---------|-----------|-----------|-----------|
| ØA O.D. | 6"        | 7"        | 8"        |
| B       | 12"       | 13"       | 14 1/4"   |
| ORDER # | 6DT-FCS-2 | 7DT-FCS-2 | 8DT-FCS-2 |
| STOCK # | 810018509 | 810018510 | 810018511 |


## Firestop Radiation Shield

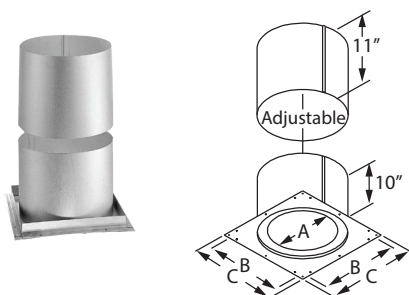

Use in ceiling/floor penetrations when a ceiling support is not used. Not required when passing through the roof. Fits on underside of ceiling and adjusts to cover framing.

| SIZE    | 5"        | 6"        | 7"        | 8"        |
|---------|-----------|-----------|-----------|-----------|
| A       | 7 1/8"    | 8 1/8"    | 9 1/8"    | 10 1/8"   |
| B       | 10 7/8"   | 11 7/8"   | 12 7/8"   | 13 7/8"   |
| C       | 13"       | 14"       | 15"       | 16"       |
| ORDER # | 5DT-FRS   | 6DT-FRS   | 7DT-FRS   | 8DT-FRS   |
| STOCK # | 810000039 | 810000121 | 810000190 | 810000262 |


## Attic Insulation Shield

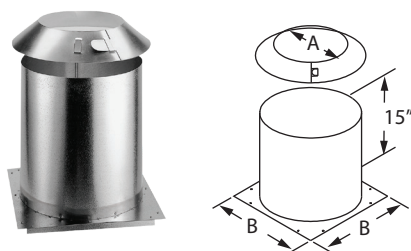

Required for installations that pass through an attic to prevent insulation and debris from accumulating near the chimney. Fits over Firestop Radiation Shield or a support box. Consists of two parts – a collar and a base.

| SIZE    | 5"        | 6"        | 7"        | 8"        |
|---------|-----------|-----------|-----------|-----------|
| A       | 7"        | 8"        | 9"        | 10"       |
| B       | 13"       | 14"       | 15"       | 16"       |
| ORDER # | 5DT-IS    | 6DT-IS    | 7DT-IS    | 8DT-IS    |
| STOCK # | 810000040 | 810000122 | 810000191 | 810000263 |


## Roof Radiation Shield

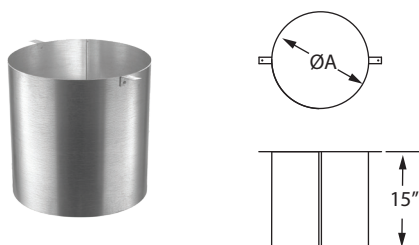

Install where a chimney passes through a roof. May be required for Canadian factory-built fireplaces, refer to appliance manufacturer's installation instructions.

| SIZE    | 5"        | 6"        | 7"        | 8"        |
|---------|-----------|-----------|-----------|-----------|
| A       | 9"        | 10"       | 11"       | 12"       |
| ORDER # | 5DT-RRS   | 6DT-RRS   | 7DT-RRS   | 8DT-RRS   |
| STOCK # | 810000041 | 810000123 | 810000192 | 810000264 |


## Adjustable Roof Support



Used to support up to 30' of chimney at the roof-deck. The mounting brackets swivel to suit most roof pitches. Ideal for use with vaulted or cathedral applications. Can also be used as a supplemental support.

| SIZE    | 5" & 7"   | 6" & 8"   |
|---------|-----------|-----------|
| A       | 7", 9"    | 8", 10"   |
| ORDER # | 5DT-ARS   | 6DT-ARS   |
| STOCK # | 810007991 | 810007992 |

Trim Collar for  
Roof Support

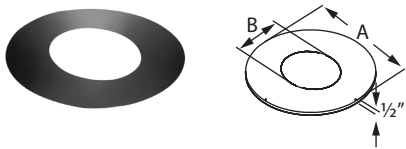

Conceals gap between chimney pipe and ceiling cut out when used with Roof Support. Galvalume. Painted black. Order to match appropriate ceiling pitch.

| SIZE                           |         | 5"         | 6"         | 7"         | 8"         |
|--------------------------------|---------|------------|------------|------------|------------|
| A                              |         | 18"        | 18"        | 20"        | 20"        |
| B                              |         | 7 1/4"     | 8 1/4"     | 9 1/4"     | 10 1/4"    |
| Ceiling Pitch<br>0/12 - 3/12   | ORDER # | 5DT-RSTC3  | 6DT-RSTC3  | 7DT-RSTC3  | 8DT-RSTC3  |
|                                | STOCK # | 810000026  | 810000105  | 810000179  | 810000246  |
| Ceiling Pitch<br>4/12 - 6/12   | ORDER # | 5DT-RSTC6  | 6DT-RSTC6  | 7DT-RSTC6  | 8DT-RSTC6  |
|                                | STOCK # | 810000027  | 810000106  | 810000180  | 810000247  |
| Ceiling Pitch<br>7/12 - 9/12   | ORDER # | 5DT-RSTC9  | 6DT-RSTC9  | 7DT-RSTC9  | 8DT-RSTC9  |
|                                | STOCK # | 810000028  | 810000107  | 810000181  | 810000248  |
| Ceiling Pitch<br>10/12 - 12/12 | ORDER # | 5DT-RSTC12 | 6DT-RSTC12 | 7DT-RSTC12 | 8DT-RSTC12 |
|                                | STOCK # | 810000029  | 810000108  | 810000182  | 810000249  |


Support Box Rails



Attach to outside of Square Ceiling Support Box to provide level, temporary support. Enables installer to easily fasten the box in place without the need for another pair of hands.

| SIZE    | 6"        |
|---------|-----------|
| ORDER # | 6DT-SBRU  |
| STOCK # | 810007036 |



Wall Thimble

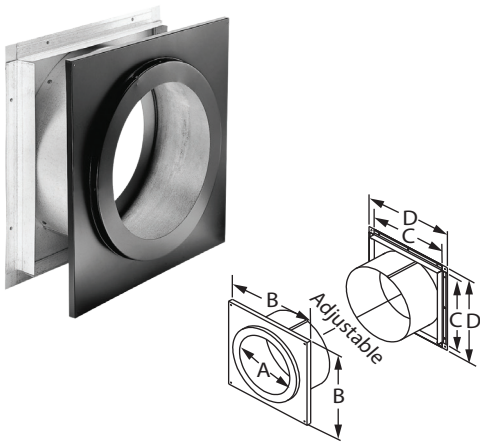

Adjusts from a minimum of 5 1/2" to a maximum of 9 1/2" wall thickness, and fits between standard wall studs. To accommodate thicker walls, the telescoping pieces can be extended up to 16" with a field-fabricated extension installed. Interior trim plate painted black. Must be installed with DuraTech chimney pipe horizontally through the wall and extend 6" into the room beyond the interior wall. (Black painted DuraTech is available). 6" and 8" stainless steel exterior trim available.

| SIZE    | 5"        | 6"        | 7"        | 8"        |
|---------|-----------|-----------|-----------|-----------|
| A       | 7 1/8"    | 8 1/8"    | 9 1/8"    | 10 1/8"   |
| B       | 14"       | 14"       | 16"       | 16"       |
| C       | 10 7/8"   | 11 7/8"   | 12 7/8"   | 13 7/8"   |
| D       | 13"       | 14"       | 15"       | 16"       |
| ORDER # | 5DT-WT    | 6DT-WT    | 7DT-WT    | 8DT-WT    |
| STOCK # | 810000030 | 810000109 | 810000183 | 810000250 |
| SS TRIM | 5"        | 6"        | 7"        | 8"        |
| ORDER # | --        | 6DT-WTSS  | --        | 8DT-WTSS  |
| STOCK # | --        | 810000110 | --        | 810000251 |


## Insulated Wall Thimble



Adjusts from a minimum of 5½" to a maximum of 9½" wall thickness, fits between standard wall studs and the interior trim is painted black. To accommodate thicker walls, the telescoping pieces can be extended up to 16" when a field-fabricated extension is installed. The Wall Thimble must be installed with DuraTech chimney pipe horizontally through the walls and extend 6" into the room beyond the interior walls. Black DuraTech and 6" and 8" stainless steel exterior trims are available. Factory installed insulation.

| SIZE    | 5"        | 6"        | 7"        | 8"        |
|---------|-----------|-----------|-----------|-----------|
| A       | 7 ¼"      | 8 ¼"      | 9 ¼"      | 10 ¼"     |
| B       | 13"       | 14"       | 15"       | 16"       |
| C       | 11"       | 12"       | 13"       | 14"       |
| ORDER # | 5DT-IWT   | 6DT-IWT   | 7DT-IWT   | 8DT-IWT   |
| STOCK # | 810014831 | 810014830 | 810014832 | 810014833 |
| SS TRIM | 5"        | 6"        | 7"        | 8"        |
| ORDER # | --        | 6DT-WTSS  | --        | 8DT-WTSS  |
| STOCK # | --        | 810000110 | --        | 810000251 |


## Adjustable Tee Support Bracket



Use as wall support for chimney system. Supports up to 50' of DuraTech Chimney without straps, and 70' of DuraTech Chimney with straps. Attaches to chimney pipe. Can be installed above or below the Tee. If installed below the Tee, a short section of pipe is required. Adjustable base provides 2" to 6" clearance to wall.

| SIZE | 5"      | 6"        | 7"        | 8"        |
|------|---------|-----------|-----------|-----------|
| A    | 7"      | 8"        | 9"        | 10"       |
| B    | 10"     | 10"       | 12"       | 12"       |
| C    | 11"     | 11"       | 13"       | 13"       |
| D    | 11 ¾"   | 11 ¾"     | 13 ¾"     | 13 ¾"     |
| GA   | ORDER # | 5DT-TSB   | 6DT-TSB   | 7DT-TSB   |
|      | STOCK # | 810000033 | 810000111 | 810000184 |
| SS   | ORDER # | 5DT-TSBSS | 6DT-TSBSS | 7DT-TSBSS |
|      | STOCK # | 810000034 | 810000112 | 810000185 |


## Adjustable Re-Support Bracket



Supports up to 20' of DuraTech chimney. Can be installed above or below the tee. Adjustable base slides easily to provide between 2" and 6" of clearance to the wall. Can be used in place of tee support for chimneys under 20'. Or as an addition to tee support that goes beyond 50'.

| SIZE    | 5" & 7"   | 6" & 8"   |
|---------|-----------|-----------|
| A       | 7", 9"    | 8", 10"   |
| ORDER # | 5DT-RES   | 6DT-RES   |
| STOCK # | 810007999 | 810008000 |


Wall Strap

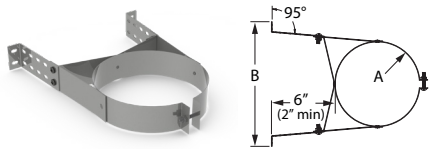

Use in interior or exterior installations to add lateral support to the chimney. Assures a 2" to 6" clearance to combustible walls. Required every 8'.

| SIZE |         | 6"        | 8"        |
|------|---------|-----------|-----------|
| A    |         | 8"        | 10"       |
| B    |         | 11 ¾"     | 14"       |
| GA   | ORDER # | 6DT-WS    | 8DT-WS    |
|      | STOCK # | 810000137 | 810000278 |
| SS   | ORDER # | 6DT-WSSS  | 8DT-WSSS  |
|      | STOCK # | 810000138 | 810000279 |

Adjustable Wall Strap

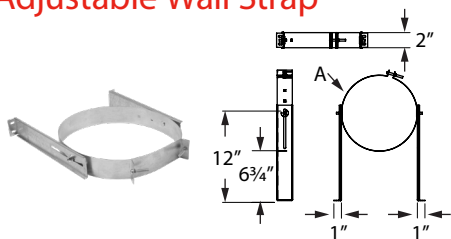


Use in interior or exterior installations to add lateral support to the chimney. Assures a 2" to 6" clearance to combustible walls. Required every 8'. This universal part covers 2 diameters.

| SIZE |         | 5" & 7"    | 6" & 8"    |
|------|---------|------------|------------|
| A    |         | 7", 9"     | 8", 10"    |
| GA   | ORDER # | 5DT-AWS    | 6DT-AWS    |
|      | STOCK # | 810007987  | 810007988  |
| SS   | ORDER # | 5DT-AWS-SS | 6DT-AWS-SS |
|      | STOCK # | 810008010  | 810008012  |

| Diameter | Adjustability |       |
|----------|---------------|-------|
|          | Min           | Max   |
| 5"       | 8 ½"          | 15 ½" |
| 6"       | 8"            | 15"   |
| 7"       | 7 ½"          | 14 ½" |
| 8"       | 7"            | 14"   |

Adjustable Extended Wall Strap




Stabilizes chimney while offering additional clearance. See Adjustability Chart for Min and Max. One part covers 2 diameters. Also available in Stainless Steel (SS).

| SIZE |         | 5" & 7"     | 6" & 8"     |
|------|---------|-------------|-------------|
| A    |         | 7", 9"      | 8", 10"     |
| GA   | ORDER # | 5DT-AWSX    | 6DT-AWSX    |
|      | STOCK # | 810009651   | 810009652   |
| SS   | ORDER # | 5DT-AWSX-SS | 6DT-AWSX-SS |
|      | STOCK # | 810009960   | 810009961   |

| Diameter | Adjustability |       |
|----------|---------------|-------|
|          | Min           | Max   |
| 5"       | 8 ½"          | 15 ½" |
| 6"       | 8"            | 15"   |
| 7"       | 7 ½"          | 14 ½" |
| 8"       | 7"            | 14"   |


Adjustable Extended Wall Support

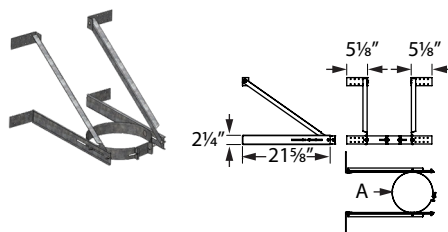

Use above the tee to provide support when bypassing obstructions or overhangs. Supports up to 20' of chimney. See Adjustability Chart for Min and Max. Also available in Stainless Steel (SS).




| SIZE    | 5" & 7"   | 5" & 7" (SS) | 6" & 8"   | 6" & 8" (SS) |
|---------|-----------|--------------|-----------|--------------|
| A       | 7", 9"    | 7", 9"       | 8", 10"   | 8", 10"      |
| ORDER # | 5DT-XWS   | 5DT-XWS-SS   | 6DT-XWS   | 6DT-XWS-SS   |
| STOCK # | 810007997 | 810009962    | 810007998 | 810009963    |

| Diameter | Adjustability |       |
|----------|---------------|-------|
|          | Min           | Max   |
| 5"       | 8 ½"          | 15 ½" |
| 6"       | 8"            | 15"   |
| 7"       | 7 ½"          | 14 ½" |
| 8"       | 7"            | 14"   |

**Finishing Collar w/ Adapter**



Finishing Collar with Integrated Adapter (Flue Extension) fits into the female end of the chimney pipe to provide a decorative black finish. Use on chimney pipe that is suspended with the roof support system or on pipe that is passing through a wall thimble. Works with both single-wall and double-wall stovepipe.

| SIZE    | 5"        | 6"        | 7"        | 8"        |
|---------|-----------|-----------|-----------|-----------|
| A       | 5"        | 6"        | 7"        | 8"        |
| B       | 6 1/2"    | 7 1/2"    | 8 1/2"    | 9 1/2"    |
| C       | 7"        | 8"        | 9"        | 10"       |
| ORDER # | 5DT-FC    | 6DT-FC    | 7DT-FC    | 8DT-FC    |
| STOCK # | 810000037 | 810000115 | 810000188 | 810000256 |

**Anchor Plate**

Use to attach DuraTech Chimney to an appliance or masonry fireplace. Check with appliance manufacturer to ensure DuraTech Chimney is approved for use.


| SIZE    | 5"        | 6"        | 7"        | 8"        |
|---------|-----------|-----------|-----------|-----------|
| A       | 5"        | 6"        | 7"        | 8"        |
| B       | 7"        | 8"        | 9"        | 10"       |
| C       | 9"        | 10"       | 11"       | 12"       |
| ORDER # | 5DT-AP    | 6DT-AP    | 7DT-AP    | 8DT-AP    |
| STOCK # | 810000038 | 810000116 | 810000189 | 810000257 |

**Transition Anchor Plate**

Use when converting from DuraLiner to DuraTech in chimney restoration. Use with a DuraLiner Slip Connector and Hanger.

| SIZE    | 6"          | 6"          | 6"          | 6"          |
|---------|-------------|-------------|-------------|-------------|
| A       | 14"         | 17"         | 13"         | 17"         |
| B       | 17"         | 17"         | 21"         | 21"         |
| ORDER # | 6DT-AP14x17 | 6DT-AP17x17 | 6DT-AP13x21 | 6DT-AP17x21 |
| STOCK # | 810000117   | 810000118   | 810000119   | 810000120   |
| SIZE    | 8"          | 8"          | 8"          | 8"          |
| A       | 14"         | 17"         | 13"         | 17"         |
| B       | 17"         | 17"         | 21"         | 21"         |
| ORDER # | 8DT-AP14x17 | 8DT-AP17x17 | 8DT-AP13x21 | 8DT-AP17x21 |
| STOCK # | 810000258   | 810000259   | 810000260   | 810000261   |


## 5"-8" Pass Through Radiation Shield

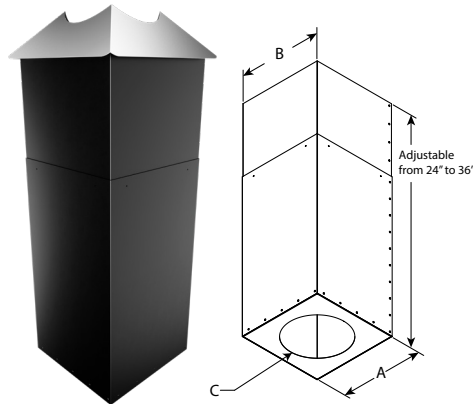

Use when insulated chimney passes up through a ceiling penetration from below. Ideal for use above a factory-built fireplace. Suited for flat, vaulted, or cathedral applications, and within shallow attics where access is limited. Integrated Firestop on bottom. Top can serve as an Attic Radiation Shield where required. Factory supplied square-to-round collar is included. Effective height (length) with standard extension is adjustable from 24" up to maximum of 36".

| SIZE    | 6"        | 7"        | 8"        |
|---------|-----------|-----------|-----------|
| A       | 12"       | 13"       | 14.25"    |
| B       | 12"       | 13"       | 14.25"    |
| C       | 8.25"     | 9.25"     | 10.25"    |
| ORDER # | 6DT-SRSE  | 7DT-SRSE  | 8DT-SRSE  |
| STOCK # | 810018519 | 810018520 | 810018521 |


## Chase Top Flashing

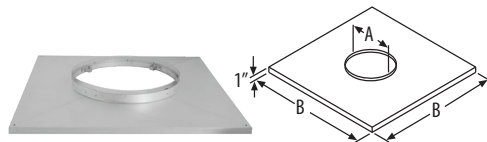

Encloses the top of a chase. Includes spacer clips to provide ventilation air passage from the chase. Storm Collar not included. Made of Galvalume.

| SIZE    | 5"        | 6"        | 7"        | 8"        |
|---------|-----------|-----------|-----------|-----------|
| A       | 10"       | 11"       | 12"       | 13"       |
| B       | 18 3/4"   | 19 3/4"   | 20 3/4"   | 21 3/4"   |
| ORDER # | 5DT-CTF   | 6DT-CTF   | 7DT-CTF   | 8DT-CTF   |
| STOCK # | 810000042 | 810000124 | 810000193 | 810000265 |


## Adjustable Extended Roof Bracket

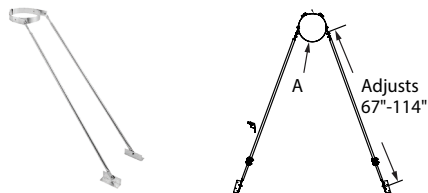

Required to stabilize chimney against wind-loading when 5 feet or more extends above the roofline. Brace arms are adjustable from 67" up to 114". Not intended to provide protection against sliding ice or snow.

| SIZE    | 5" & 7"   | 6" & 8"   |
|---------|-----------|-----------|
| A       | 7", 9"    | 8", 10"   |
| ORDER # | 5DT-XRS   | 6DT-XRS   |
| STOCK # | 810007989 | 810007990 |

## Snow Splitter





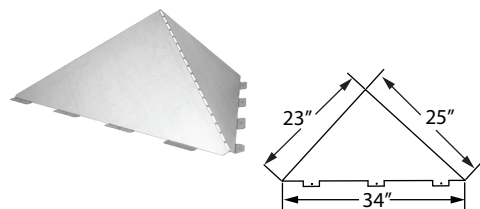


Three times thicker and stronger, allowing it to stand up against heavier snow loads. Bendable attachment flanges allow it to mount on any roof slope. Use to divert snow around chimney, vent and roof flashing. Constructed of paintable galvanized material. Ships flat for easy assembly. Works with 6", 7", 8", and 10".

| SIZE    | 6"        |
|---------|-----------|
| ORDER # | 6DT-SP    |
| STOCK # | 810007981 |

## Roof Flashing


Roof Pitch

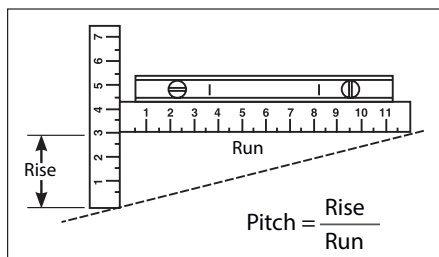

Use to weather proof the penetration of chimney pipe through the roof. Storm Collar required. Select roof flashing based on pitch of roof. For example, a 6/12 pitch has a vertical rise of 6" over a horizontal distance of 12". Made of galvalume. 6"- 8" available with large base.

| ADJUSTABLE SIZE          |         | 5"        | 6"        | 7"        | 8"        |
|--------------------------|---------|-----------|-----------|-----------|-----------|
| 0/12 - 6/12              | A       | 7 1/2"    | 8 1/2"    | 9 1/2"    | 10 1/2"   |
|                          | B       | 19"       | 20"       | 21"       | 22"       |
|                          | C       | 26"       | 27 3/16"  | 28 3/16"  | 29 1/2"   |
|                          | ORDER # | 5DT-F6    | 6DT-F6    | 7DT-F6    | 8DT-F6    |
|                          | STOCK # | 810000045 | 810000126 | 810000196 | 810000267 |
| 7/12 - 12/12             | A       | 7 1/2"    | 8 1/2"    | 9 1/2"    | 10 1/2"   |
|                          | B       | 19"       | 20"       | 21"       | 22"       |
|                          | C       | 28 3/16"  | 30"       | 31 3/16"  | 33 1/4"   |
|                          | ORDER # | 5DT-F12   | 6DT-F12   | 7DT-F12   | 8DT-F12   |
|                          | STOCK # | 810000046 | 810000128 | 810000197 | 810000269 |
| 13/12 - 18/12            | A       | 7 1/2"    | 8 1/2"    | 9 1/2"    | 10 1/2"   |
|                          | B       | 19"       | 20"       | 21"       | 22"       |
|                          | C       | 32 3/16"  | 34 3/8"   | 36 3/16"  | 38"       |
|                          | ORDER # | 5DT-F18   | 6DT-F18   | 7DT-F18   | 8DT-F18   |
|                          | STOCK # | 810000047 | 810000130 | 810000198 | 810000271 |
| 19/12 - 24/12            | A       | 7 1/2"    | 8 1/2"    | 9 1/2"    | 10 1/2"   |
|                          | B       | 19"       | 20"       | 21"       | 22"       |
|                          | C       | 37 3/16"  | 39 1/2"   | 41 3/4"   | 44"       |
|                          | ORDER # | 5DT-F24   | 6DT-F24   | 7DT-F24   | 8DT-F24   |
|                          | STOCK # | 810000048 | 810000131 | 810000199 | 810000272 |
| FLAT ROOF                |         | 5"        | 6"        | 7"        | 8"        |
|                          | A       | 7 1/4"    | 8 1/4"    | 9 1/4"    | 10 1/4"   |
|                          | B       | 19 7/16"  | 20 1/16"  | 21 5/8"   | 21 5/8"   |
|                          | ORDER # | 5DT-FF    | 6DT-FF    | 7DT-FF    | 8DT-FF    |
|                          | STOCK # | 810000049 | 810000132 | 810000200 | 810000273 |
| LRG BASE ADJUSTABLE SIZE |         | 5"        | 6"        | 7"        | 8"        |
| 0/12 - 6/12              | A       | --        | 8 1/4"    | 9 1/4"    | 10 1/4"   |
|                          | B       | --        | 28"       | 29"       | 30"       |
|                          | C       | --        | 27 3/16"  | 28 3/16"  | 29 1/2"   |
|                          | ORDER # | --        | 6DT-F6L   | 7DT-F6L   | 8DT-F6L   |
|                          | STOCK # | --        | 810000133 | 810000201 | 810000274 |
| 7/12 - 12/12             | A       | --        | 8 1/4"    | 9 1/4"    | 10 1/4"   |
|                          | B       | --        | 28"       | 29"       | 30"       |
|                          | C       | --        | 30"       | 31"       | 33"       |
|                          | ORDER # | --        | 6DT-F12L  | 7DT-F12L  | 8DT-F12L  |
|                          | STOCK # | --        | 810000134 | 810000202 | 810000275 |

DSA Roof Flashings

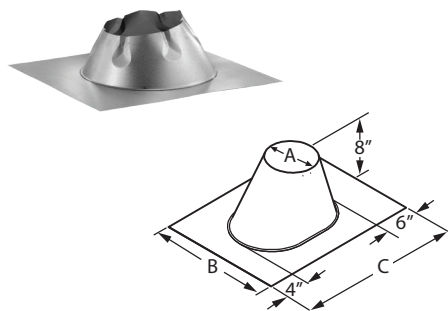

This flashing features a base plate made of malleable (aka “Dead-Soft”) aluminum. Easily shaped-by-hand to match corrugated metal roofing or rounded clay-tile shingles.

| STOCK #      |         | 6"         | 8"         |
|--------------|---------|------------|------------|
| 0/12 - 6/12  | A       | 9"         | 11"        |
|              | B       | 20"        | 30"        |
|              | C       | 27 3/16"   | 29 1/2"    |
|              | ORDER # | 6DT-F6DSA  | 8DT-F6DSA  |
|              | STOCK # | 810000127  | 810000268  |
| 7/12 - 12/12 | A       | 9"         | 11"        |
|              | B       | 20"        | 24 1/4"    |
|              | C       | 30"        | 33 1/4"    |
|              | ORDER # | 6DT-F12DSA | 8DT-F12DSA |
|              | STOCK # | 810000129  | 810000270  |


Universal Rubber Boot Flashing Kit



Easily modified to fit DuraTech chimney diameters from 5" up to 8". Intended for use on sloped metal corrugated roofs with up to 12/12 pitch. (10/12 for 8" diameter). Base (measures 23" x 23") and cone are made of durable black EPDM rubber. Can be painted to match roof if desired using acrylic paint. Rubber Boot kit includes shield, spacer kit, storm collar, pest screen, and mounting hardware.

| SIZE    | 5" - 8" |
|---------|---------|
| ORDER # | URBAK   |
| STOCK # | 200275  |


Storm Collar

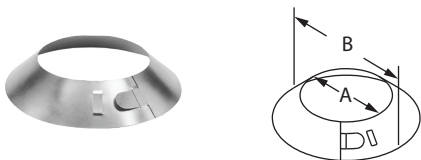

Required with DuraTech flashing to create a weather-proof penetration through the roof deck. Seal inner edge of the collar to the chimney pipe with non-hardening 500° F high-temperature sealant. Made with Galvalume.

| SIZE    | 5"- 6"    | 7"- 8"    |
|---------|-----------|-----------|
| A       | 7"- 8"    | 9"- 10"   |
| B       | 12"- 14"  | 15"- 16"  |
| ORDER # | 5DT-SC    | 7DT-SC    |
| STOCK # | 810000043 | 810000194 |


## Chimney Cap

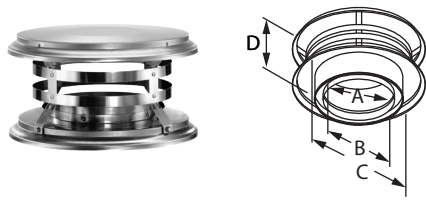

Required to keep precipitation out of the chimney. Stainless cap is secured to skirt with four screws. Allows removal for inspection and cleaning. Spark arrestor is sold separately.

| SIZE    | 5"        | 6"        | 7"        | 8"        |
|---------|-----------|-----------|-----------|-----------|
| A       | 5"        | 6"        | 7"        | 8"        |
| B       | 7"        | 8"        | 9"        | 10"       |
| C       | 11"       | 11"       | 15"       | 15"       |
| D       | 6 1/2"    | 6 1/2"    | 6 1/2"    | 6 1/2"    |
| ORDER # | 5DT-VC    | 6DT-VC    | 7DT-VC    | 8DT-VC    |
| STOCK # | 810000050 | 810000135 | 810000203 | 810000276 |

## Spark Arrestor




Use with cap where required to prevent burning embers from escaping. As an added benefit, keeps birds, bats, and other small animals from entering the chimney.

Trim mesh to suit cap. Made of stainless steel.

| SIZE    | 5" - 8"   |
|---------|-----------|
| ORDER # | 5DT-SA    |
| STOCK # | 810000054 |

## DIKAPT Chimney Cap


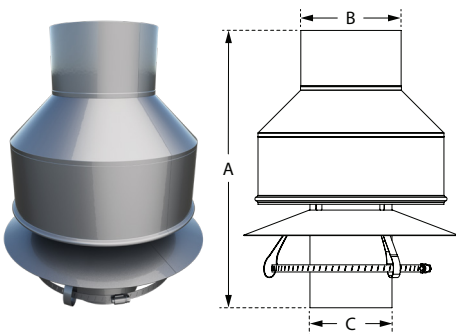


Designed to address chimneys with downdraft issues. Diverts wind and rain to ensure flue gases are directed outward efficiently & effectively. Constructed of 300 Series Stainless Steel for strength & durability.

Listed and approved to UL 103 Type HT.

| SIZE    | 5"      | 6"      | 7"      | 8"      |
|---------|---------|---------|---------|---------|
| A       | 17 1/4" | 19 1/4" | 19 1/4" | 19 1/4" |
| B       | 6"      | 7"      | 8"      | 9"      |
| C       | 4 3/4"  | 5 3/4"  | 6 3/4"  | 7 3/4"  |
| ORDER # | 195802  | 196802  | 197802  | 198802  |
| STOCK # | 5DK     | 6DK     | 7DK     | 8DK     |

## Chase Air Intake w/ Rodent Guard

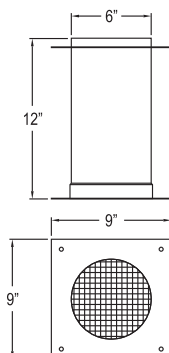

Allows required ventilation air into chase. Screen keeps rodents out.

| SIZE    | 6"        |
|---------|-----------|
| ORDER # | 6DT-CAI   |
| STOCK # | 810005052 |

[illegible]



BUILD FOR THE FUTURE

## Our Portfolio of Brands

|                          |                                                                            |
|--------------------------|----------------------------------------------------------------------------|
| AirMate® .....           | <a href="http://www.airmate.com">www.airmate.com</a>                       |
| AmeriFlow® .....         | <a href="http://www.ameriflowregisters.com">www.ameriflowregisters.com</a> |
| Amerivent® .....         | <a href="http://www.ameri-vent.com">www.ameri-vent.com</a>                 |
| AMPCO® .....             | <a href="http://www.ampcostacks.com">www.ampcostacks.com</a>               |
| Builder's Best® .....    | <a href="http://www.buildersbest.com">www.buildersbest.com</a>             |
| Duravent™ .....          | <a href="http://www.duravent.com">www.duravent.com</a>                     |
| Hart & Cooley® .....     | <a href="http://www.hartandcooley.com">www.hartandcooley.com</a>           |
| Heatfab® .....           | <a href="http://www.heatfab.com">www.heatfab.com</a>                       |
| Lima® .....              | <a href="http://www.limaregister.com">www.limaregister.com</a>             |
| Milcor® .....            | <a href="http://www.milcorinc.com">www.milcorinc.com</a>                   |
| Portals Plus™ .....      | <a href="http://www.portalsplus.com">www.portalsplus.com</a>               |
| RPST™ .....              | <a href="http://www.rpscurbs.com">www.rpscurbs.com</a>                     |
| Security Chimneys® ..... | <a href="http://www.securitychimneys.com">www.securitychimneys.com</a>     |
| Selkirk® .....           | <a href="http://www.selkirkcorp.com">www.selkirkcorp.com</a>               |

## Corporate Headquarters

Duravent Group  
28 W. Adams, Suite 1810  
Detroit, MI 48226  
Tel: 800.835.4429  
Email: [info@duraventgroup.com](mailto:info@duraventgroup.com)  
[www.duraventgroup.com](http://www.duraventgroup.com)

## Contact Us

For more information about our products or to contact us directly, please go to any of our websites and click on the Contact section on the website.

# duravent™



For warranty information:  
Scan this QR code or visit  
[www.duraventgroup.com/warranties](http://www.duraventgroup.com/warranties)

©2026 Duravent Group.  
Duravent is a trademark of the Duravent Group.  
DV\_DT\_CT-001E\_08-26

# dur<sup>Λ</sup>vent™

GROUP

BUILD FOR THE FUTURE

[www.duraventgroup.com](http://www.duraventgroup.com)

