

NEW Relining a Factory-Built Chimney Can Now Be Done Safely With a Listed System

M&G DuraVent is the first manufacturer to have a UL-listed relining system for factory-built chimneys to be used with solid-fuel appliances in the USA. When a homeowner installs a wood-burning insert into an existing UL127-listed fireplace, relining the existing chimney is critical for performance and safety.

What does the UL listing cover?



- All 127, 103, or 103HT chimneys
- Insulated chimneys- all sizes with 2" clearance
- Air cooled - clearance based on diameter
- All M&G Duravent UL1777 systems up to 8"
- Flex does not need insulation!!!

Air Cooled Chimney Coverage:

- Up to 8" I.D. chimneys with at least 1 1/4" wall (ex. 8x10 1/2)
- 6x8 1/2 is OK, 8x11 is OK
- Up to 8" I.D. chimneys require at least 1 1/2" clearance
- Larger chimneys with at least 1 1/2" wall (ex. 10x13)
- 9x12 is OK, 10x14 is OK, 16x19 is OK
- Chimneys larger than 8" require at least 2" clearance

Factory-Built Reline Kit includes:

- Cap
- Storm Collar
- Support Bracket
- Ventilation Disk
- Centering Bracket
- DuraLiner 12" Length
- Flex Connector
- Flex Length (25' or 35')
- Adjustable Band
- Flex Adapter

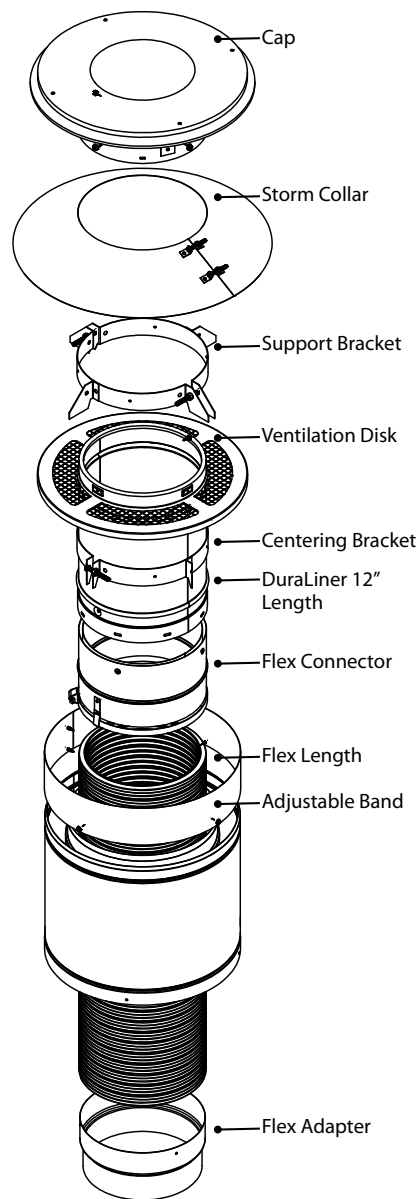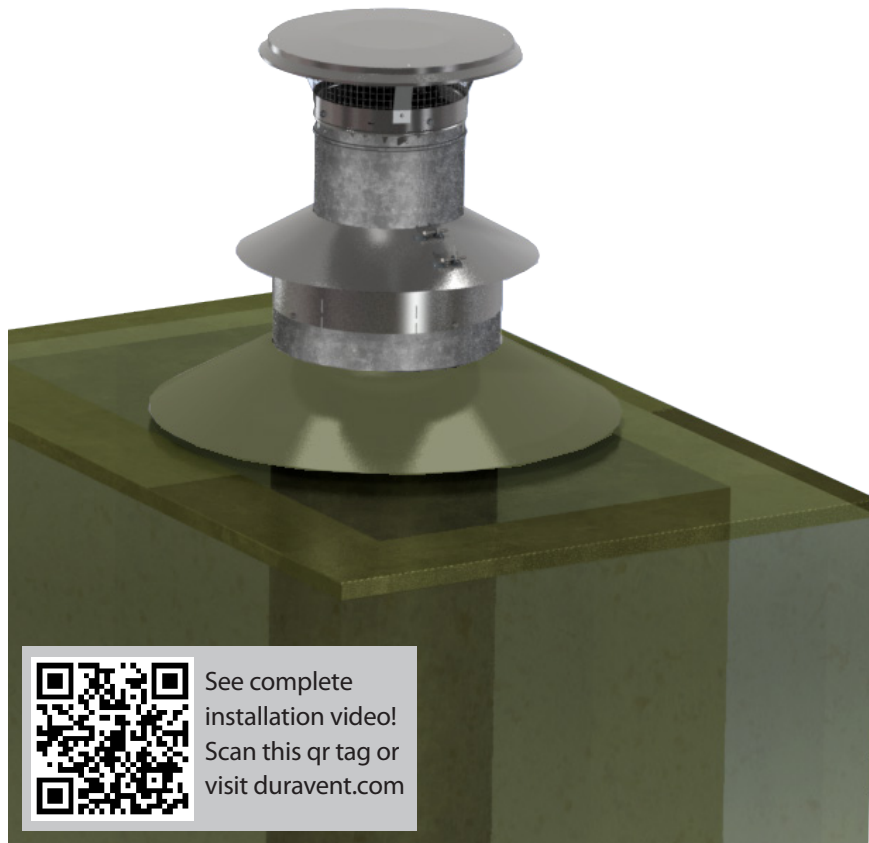

See complete installation video! Scan this qr tag or visit duravent.com

SIZE	DuraFlex Pro	DuraFlex 304	DuraFlex 316
6" Dia 25' Length	6DFPRO-25KFB	6DF304-25KFB	6DF316-25KFB
6" Dia 35' Length	6DFPRO-35KFB	6DF304-35KFB	6DF316-35KFB

DuraVent

Member of **M&G Group**

For current pricing and availability, please call customer service at 800-835-4429.

Information published in all M&G DuraVent bulletins is current at time of publication and is subject to change without notice.